

EW808

Eyewash, Recessed Deck Mounted, Exposed Valve



Application: Eyewash for recessed mounting in countertop. Valve is mounted on top of counter.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Valve is mounted on counter and activated by flag handle.

Bowl: 13" (330mm) diameter stainless steel with flanged rim for mounting in countertop. Furnished with all hardware necessary for installation in counter.

Supply: 1/2" NPT male inlet.

Waste: 1-1/4" NPT female outlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

EW810

Eyewash, Recessed Deck Mounted, Concealed Valve



Application: Eyewash for recessed mounting in countertop. Valve is mounted below counter.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS brass stay-open ball valve. Valve is mounted on aluminum angle bracket below counter and activated by push-down knob.

Bowl: 13" (330mm) diameter stainless steel with flanged rim for mounting in countertop. Furnished with all hardware necessary for installation in counter.

Supply: 1/2" NPT male inlet.

Waste: 1-1/4" NPT female outlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:

- Stainless steel dust cover for each spray head (add suffix “DC”)
- Chrome plated brass tailpiece and trap with 1-1/2" IPS waste connection (add suffix “T”)
- 1-1/2" OD chrome plated brass tailpiece (add suffix “TP”)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.

EW814

Eyewash, Wall Mounted



Application: Eyewash for wall mounting.

Mounting: Cast aluminum wall bracket with epoxy powder coated finish.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Bowl: 11-1/2" (292mm) diameter stainless steel.

Supply: 1/2" NPT female inlet.

Waste: 1-1/4" NPT female outlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

EW814BC

Eyewash, Wall Mounted, Bowl Cover



Application: Eyewash for wall mounting. Unit has stainless steel cover to protect bowl and spray heads from dust, dirt and other contaminants.

Mounting: Cast aluminum wall bracket with epoxy powder coated finish.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has an internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Bowl: 11-1/2" (292mm) diameter stainless steel with bowl cover. Cover is raised automatically when flag handle is activated. Cover closes when handle is returned to closed position.

Supply: 1/2" NPT female inlet.

Waste: 1-1/4" NPT female outlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:



- Stainless steel dust cover for each spray head (add suffix “DC”)
- Chrome plated brass tailpiece and trap with 1-1/2" IPS waste connection (add suffix “T”)
- 1-1/2" OD chrome plated brass tailpiece (add suffix “TP”)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.

EW805

Eyewash, Deck Mounted, 90 Degree AutoFlow™

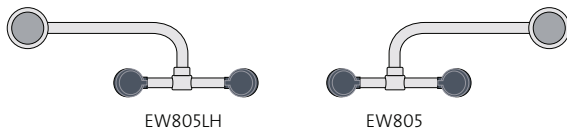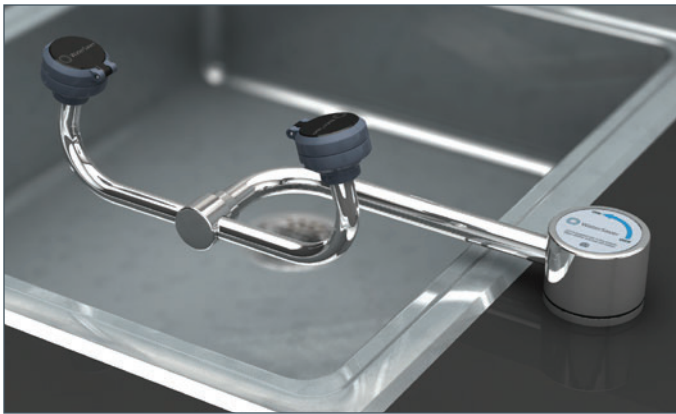

Application: AutoFlow™ eyewash for mounting on counter next to sink. Water flow is activated by swinging the spray head assembly out over sink.

Construction: Polished chrome plated brass.

Mounting: Unit is mounted on right (EW805) or left (EW805LH) side of sink.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS brass plug-type valve with O-ring seals. Swinging spray head assembly from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.

Supply: 1/2" NPT female inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

EW895

Eyewash, Deck Mounted, 90 Degree AutoFlow™, All-Stainless Steel



Application: All-stainless steel AutoFlow™ eyewash for mounting on counter next to sink. Water flow is activated by swinging the spray head assembly out over sink.

Construction: Type 316 stainless steel.

Mounting: Unit is mounted on right (EW895) or left (EW895LH) side of sink.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS stainless steel plug-type valve with O-ring seals. Swinging spray head assembly from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.

Supply: 1/2" NPT female inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:

- Stainless steel dust cover for each spray head (add suffix “DC”)

Finish Options (EW805 only):

- Polished chrome plated finish with clear epoxy coating (PCL)
- Satin chrome plated finish with clear epoxy coating (SCC)
- Satin nickel plated finish with clear epoxy coating (SNC)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.

EW806

Eyewash, Deck Mounted, 90 Degree Swivel



Application: Swivel eyewash for mounting on counter next to sink. Water flow is activated by flag handle.

Construction: Polished chrome plated brass.

Mounting: Unit is mounted on right (EW806) or left (EW806LH) side of sink.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow. Spray heads swivel 90 degrees from storage to operational position.

Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Supply: 1/2" NPT male inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

EW893

Eyewash, Deck Mounted, 90 Degree Swivel, All-Stainless Steel



Application: All-stainless steel swivel eyewash for mounting on counter next to sink. Water flow is activated by flag handle.

Construction: Type 316 stainless steel.

Mounting: Unit is mounted on right (EW893) or left (EW893LH) side of sink.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow. Spray heads swivel 90 degrees from storage to operational position.

Valve: 1/2" IPS stainless steel stay-open ball valve. Valve has stainless steel ball and PTFE seals.

Supply: 1/2" NPT male inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:

- Stainless steel dust cover for each spray head (add suffix “DC”)

Finish Options (EW806 only):


- Polished chrome plated finish with clear epoxy coating (PCL)
- Satin chrome plated finish with clear epoxy coating (SCC)
- Satin nickel plated finish with clear epoxy coating (SNC)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.

EW848

Eyewash, Wall Mounted, 90 Degree AutoFlow™

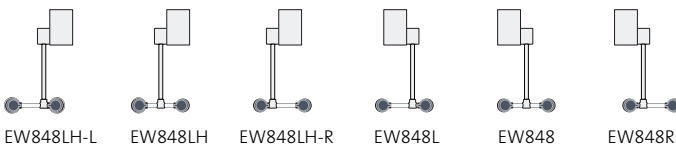

Application: AutoFlow™ eyewash for mounting on wall behind sink. Water flow is activated by swinging the spray head assembly down over sink.

Construction: Polished chrome plated brass.

Mounting: Unit is mounted on wall behind sink. Furnished with stainless steel housing for valve and inlet piping. Note: If unit is not installed at a sink, a floor drain should be provided underneath unit to prevent accumulation of water on floor.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS brass plug-type valve with O-ring seals. Swinging spray head assembly down from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back up into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.


Supply: 1/2" NPT female union inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

EW898

Eyewash, Wall Mounted, 90 Degree AutoFlow™, All-Stainless Steel

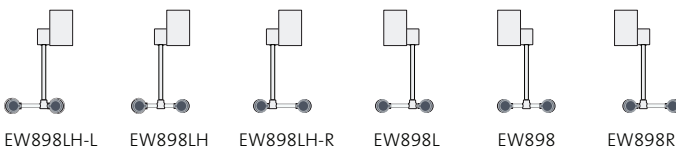

Application: All-stainless steel AutoFlow™ eyewash for mounting on wall behind sink. Water flow is activated by swinging the spray head assembly down over sink.

Construction: Type 316 stainless steel.

Mounting: Unit is mounted on wall behind sink. Furnished with stainless steel housing for valve and inlet piping. Note: If unit is not installed at a sink, a floor drain should be provided underneath unit to prevent accumulation of water on floor.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS stainless steel plug-type valve with O-ring seals. Swinging spray head assembly down from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back up into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.

Supply: 1/2" NPT female union inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:

- Stainless steel dust cover for each spray head (add suffix “DC”)

Finish Options (EW848 only):


- Polished chrome plated finish with clear epoxy coating (PCL)
- Satin chrome plated finish with clear epoxy coating (SCC)
- Satin nickel plated finish with clear epoxy coating (SNC)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.

EW849

Eyewash, Deck Mounted, 90 Degree AutoFlow™

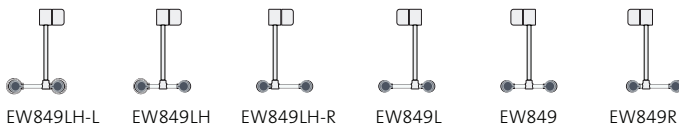

Application: AutoFlow™ eyewash for mounting on counter behind sink. Water flow is activated by swinging the spray head assembly down over sink.

Construction: Polished chrome plated brass.

Mounting: Unit is mounted on counter behind sink. Note: If unit is not installed at a sink, a floor drain should be provided underneath unit to prevent accumulation of water on floor.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS brass plug-type valve with O-ring seals. Swinging spray head assembly down from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back up into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.


Supply: 1/2" NPT male inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

EW899

Eyewash, Deck Mounted, 90 Degree AutoFlow™, All-Stainless Steel

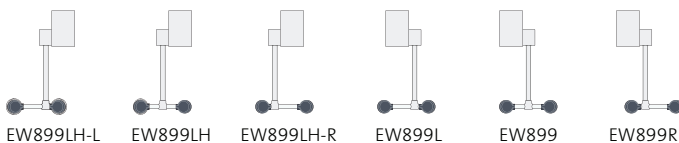

Application: Stainless steel AutoFlow™ eyewash for mounting on counter behind sink. Water flow is activated by swinging the spray head assembly down over sink.

Construction: Type 316 stainless steel.

Mounting: Unit is mounted on counter behind sink. Furnished with stainless steel housing for valve and inlet piping. Note: If unit is not installed at a sink, a floor drain should be provided underneath unit to prevent accumulation of water on floor.

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS stainless steel plug-type valve with O-ring seals. Swinging spray head assembly down from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back up into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.

Supply: 1/2" NPT male inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features

- Stainless steel dust cover for each spray head (DC)

Finish Options (EW849 only):


- Polished chrome plated finish with clear epoxy coating (PCL)
- Satin chrome plated finish with clear epoxy coating (SCC)
- Satin nickel plated finish with clear epoxy coating (SNC)

Accessories:

- AP3600 thermostatic mixing valve (TMV). Valve precisely blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014.

EWBF849

Eyewash, Deck Mounted, 90 Degree AutoFlow™, Barrier-Free

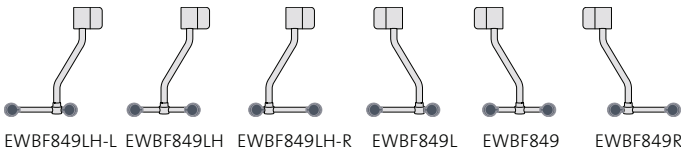

Application: Barrier-Free AutoFlow™ eyewash for mounting on counter behind sink. Water flow is activated by swinging the spray head assembly down over sink.

ADA Compliance: Unit is designed for use at handicapped accessible workstations with 34" maximum counter height and 27" knee clearance. Eyewash spray head assembly is extended and lowered to permit access by wheelchair user.

Construction: Polished chrome plated brass.

Mounting: Unit is mounted on counter behind sink. *Note: If unit is not installed at a sink, a floor drain should be provided underneath unit to prevent accumulation of water on floor.*

Spray Head Assembly: Two GS-Plus™ spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS brass plug-type valve with O-ring seals. Swinging spray head assembly down from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back up into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.

Supply: 1/2" NPT male inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:

- Stainless steel dust cover for each spray head (add suffix "DC")

Finish Options:

- Polished chrome plated finish with clear epoxy coating (PCL)
- Satin chrome plated finish with clear epoxy coating (SCC)
- Satin nickel plated finish with clear epoxy coating (SNC)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix "TMV"). Refer to "Tempering Valves" section for complete technical information.

FE724

Eye/Face Wash, Wall Mounted



Application: WideArea™ eye/face wash for wall mounting. Four GS-Plus™ spray heads deliver a flood of water over a wide area of coverage for complete rinsing of eyes and face.

Mounting: Cast aluminum wall bracket with epoxy powder coated finish.

Spray Head Assembly: Four GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Bowl: 11-1/2" (292mm) diameter stainless steel.

Supply: 1/2" NPT female inlet.

Waste: 1-1/4" NPT female outlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

FE727

Eye/Face Wash, Recessed Deck Mounted



Application: WideArea™ eye/face wash for recessed mounting in countertop. Four GS-Plus™ spray heads deliver a flood of water over a wide area of coverage for complete rinsing of eyes and face.

Spray Head Assembly: Four GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS brass stay-open ball valve. Valve is mounted on aluminum angle bracket below counter and activated by push-down knob.

Bowl: 13" (330mm) diameter stainless steel with flanged rim for mounting in countertop. Furnished with all hardware necessary for installation in counter.

Supply: 1/2" NPT male inlet.

Waste: 1-1/4" NPT female outlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:

- Stainless steel dust cover for each spray head (add suffix “DC”)
- Green ABS plastic bowl (add suffix “GRN”)
- Yellow ABS plastic bowl (add suffix “YEL”)
- Chrome plated brass tailpiece and trap with 1-1/2" IPS waste connection (add suffix “T”)
- 1-1/2" OD chrome plated brass tailpiece (add suffix “TP”)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.

FEBF721

Eye/Face Wash, Wall Mounted, Barrier-Free



Application: Barrier-free WideArea™ eye/face wash for wall mounting.

ADA Compliance: Bowl is lowered and extended to permit access by wheelchair user. Profile of unit is “flattened” to comply with maximum height and knee clearance requirements. When installed at recommended mounting height, unit complies with ADA requirements for accessibility by handicapped persons.

Mounting: Wall-mounted bowl unit has welded stainless steel wraparound skirt to conceal valve, drain and piping.

Spray Head Assembly: Four GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Bowl: 11-1/2" (292mm) diameter stainless steel bowl.

Supply: 1/2" NPT female inlet.

Waste: 1-1/2" OD chrome plated brass tailpiece.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

FEBF724

Eye/Face Wash, Wall Mounted, Barrier-Free



Application: Barrier-free WideArea™ eye/face wash for wall mounting.

ADA Compliance: Bowl is lowered and extended to permit access by wheelchair user. Profile of unit is “flattened” to comply with maximum height and knee clearance requirements. When installed at recommended mounting height, unit complies with ADA requirements for accessibility by handicapped persons.

Mounting: Welded stainless steel bracket for wall mounting.

Spray Head Assembly: Four GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Bowl: 11-1/2" (292mm) diameter stainless steel.

Supply: 1/2" NPT female inlet.

Waste: 1-1/2" OD chrome plated brass tailpiece.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:


- Stainless steel dust cover for each spray head (add suffix “DC”)
- Chrome plated brass tailpiece and trap with 1-1/2" IPS waste connection (add suffix “T”)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.

FE774

Eye/Face Wash, Deck Mounted, 90 Degree AutoFlow™



Application: AutoFlow™ eye/face wash for mounting on counter next to sink. Water flow is activated by swinging the spray head assembly out over sink.

Construction: Polished chrome plated brass.

Mounting: Unit is mounted on right (FE774) or left (FE774LH) side of sink.

Spray Head Assembly: Two FS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS brass plug-type valve with O-ring seals. Swinging spray head assembly from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.


Supply: 1/2" NPT female inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

FE795

Eye/Face Wash, Deck Mounted, 90 Degree AutoFlow™, All-Stainless Steel



Application: All-stainless steel AutoFlow™ eye/face wash for mounting on counter next to sink. Water flow is activated by swinging the spray head assembly out over sink.

Construction: Type 316 stainless steel.

Mounting: Unit is mounted on right (FE795) or left (FE795LH) side of sink.

Spray Head Assembly: Two FS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS stainless steel plug-type valve with O-ring seals. Swinging spray head assembly from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.

Supply: 1/2" NPT female inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:

- Stainless steel dust cover for each spray head (add suffix “DC”)

Finish Options (FE774 only):

- Polished chrome plated finish with clear epoxy coating (PCL)
- Satin chrome plated finish with clear epoxy coating (SCC)
- Satin nickel plated finish with clear epoxy coating (SNC)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.

FE775

Eye/Face Wash, Deck Mounted, 90 Degree Swivel



Application: Swivel eye/face wash for mounting on counter next to sink. Water flow is activated by flag handle.

Construction: Polished chrome plated brass.

Mounting: Unit is mounted on right (FE775) or left (FE775LH) side of sink.

Spray Head Assembly: Two FS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow. Spray heads swivel 90 degrees from storage to operational position.

Valve: 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Supply: 1/2" NPT male inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

FE793

Eye/Face Wash, Deck Mounted, 90 Degree Swivel,
All-Stainless Steel



Application: All-stainless steel swivel eye/face wash for mounting on counter next to sink. Water flow is activated by flag handle.

Construction: Type 316 stainless steel.

Mounting: Unit is mounted on right (FE793) or left (FE793LH) side of sink.

Spray Head Assembly: Two FS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow. Spray heads swivel 90 degrees from storage to operational position.

Valve: 1/2" IPS stainless steel stay-open ball valve with stainless steel flag handle. Valve has stainless steel ball and PTFE seals.

Supply: 1/2" NPT male inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:

- Stainless steel dust cover for each spray head (add suffix “DC”)

Finish Options (FE775 only):



- Polished chrome plated finish with clear epoxy coating (PCL)
- Satin chrome plated finish with clear epoxy coating (SCC)
- Satin nickel plated finish with clear epoxy coating (SNC)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.

FE778

Eye/Face Wash, Wall Mounted, 90 Degree AutoFlow™

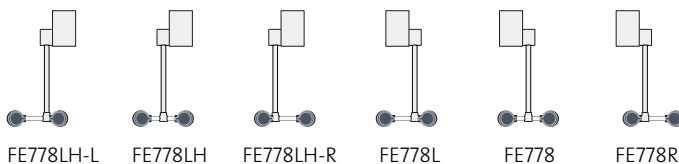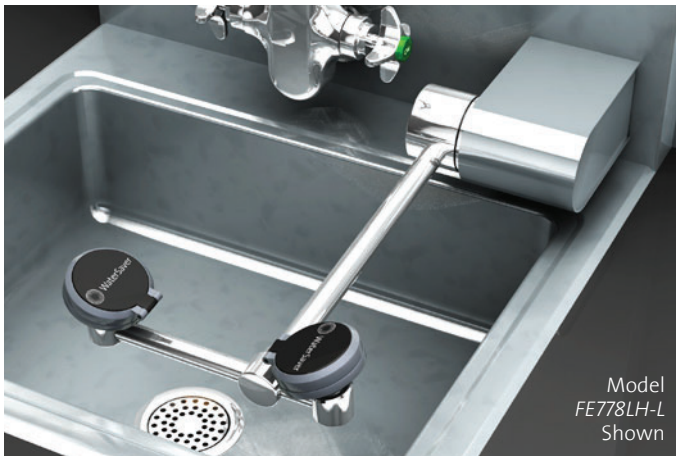

Application: AutoFlow™ eye/face wash for mounting on wall behind sink. Water flow is activated by swinging the spray head assembly down over sink.

Construction: Polished chrome plated brass.

Mounting: Unit is mounted on wall behind sink. Furnished with stainless steel housing for valve and inlet piping. *Note: If unit is not installed at a sink, a floor drain should be provided underneath unit to prevent accumulation of water on floor.*

Spray Head Assembly: Two FS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS brass plug-type valve with O-ring seals. Swinging spray head assembly down from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back up into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.


Supply: 1/2" NPT female union inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

FE798

Eye/Face Wash, Wall Mounted, 90 Degree AutoFlow™, All-Stainless Steel

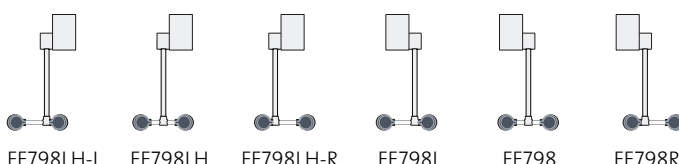

Application: Stainless steel AutoFlow™ eye/face wash for mounting on wall behind sink. Water flow is activated by swinging the spray head assembly down over sink.

Construction: Type 316 stainless steel.

Mounting: Unit is mounted on wall behind sink. Furnished with stainless steel housing for valve and inlet piping. *Note: If unit is not installed at a sink, floor drain should be provided underneath unit to prevent accumulation of water on floor.*

Spray Head Assembly: Two FS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS stainless steel plug-type valve with O-ring seals. Swinging spray head assembly down from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back up into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.

Supply: 1/2" NPT female union inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:

- Stainless steel dust cover for each spray head (add suffix “DC”)

Finish Options (FE778 only):


- Polished chrome plated finish with clear epoxy coating (PCL)
- Satin chrome plated finish with clear epoxy coating (SCC)
- Satin nickel plated finish with clear epoxy coating (SNC)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.

FE779

Eye/Face Wash, Deck Mounted, 90 Degree AutoFlow™

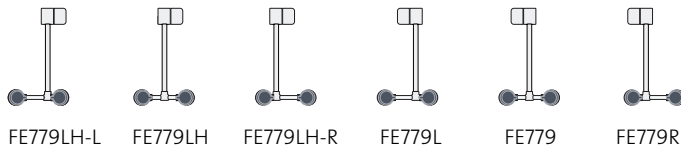

Application: AutoFlow™ eye/face wash for mounting on counter behind sink. Water flow is activated by swinging the spray head assembly down over sink.

Construction: Polished chrome plated brass.

Mounting: Unit is mounted on counter behind sink. *Note: If unit is not installed at a sink, a floor drain should be provided underneath unit to prevent accumulation of water on floor.*

Spray Head Assembly: Two FS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS brass plug-type valve with O-ring seals. Swinging spray head assembly down from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back up into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.


Supply: 1/2" NPT male inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

FE799

Eye/Face Wash, Deck Mounted, 90 Degree AutoFlow™, All-Stainless Steel

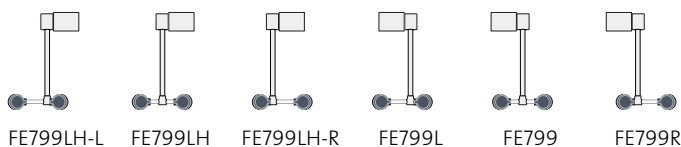

Application: All-stainless steel AutoFlow™ eye/face wash for mounting on counter behind sink. Water flow is activated by swinging the spray head assembly down over sink.

Construction: Type 316 stainless steel.

Mounting: Unit is mounted on counter behind sink. Furnished with stainless steel housing for valve and inlet piping. *Note: If unit is not installed at a sink, a floor drain should be provided underneath unit to prevent accumulation of water on floor.*

Spray Head Assembly: Two FS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS stainless steel plug-type valve with O-ring seals. Swinging spray head assembly down from storage to operational position opens orifice and activates water flow. Unit remains in operation until spray head assembly is swung back up into the storage position.

Strainer: Unit is furnished with in-line strainer to protect valve and spray heads from debris in water line.

Supply: 1/2" NPT male inlet.

Sign: Furnished with universal identification sign.

Quality Assurance: Unit is fully assembled and water tested prior to shipment. Unit is third-party certified to comply with ANSI Z358.1-2014.

Optional Features:

- Stainless steel dust cover for each spray head (add suffix “DC”)

Finish Options (FE779 only):

- Polished chrome plated finish with clear epoxy coating (PCL)
- Satin chrome plated finish with clear epoxy coating (SCC)
- Satin nickel plated finish with clear epoxy coating (SNC)

Accessories:

- AP3600 thermostatic mixing valve blends hot and cold water to deliver tepid water as provided by ANSI Z358.1-2014 (add suffix “TMV”). Refer to “Tempering Valves” section for complete technical information.